




**Quick Installation Guide**


For articles: XC...L, XC...F, XC...FM

**EAC**



61.962\_02











 0-10 bar


 0-110 °C


Acc. PED (2014/68/EU) §4.3







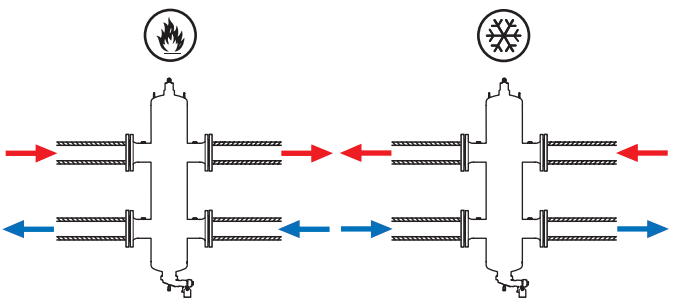

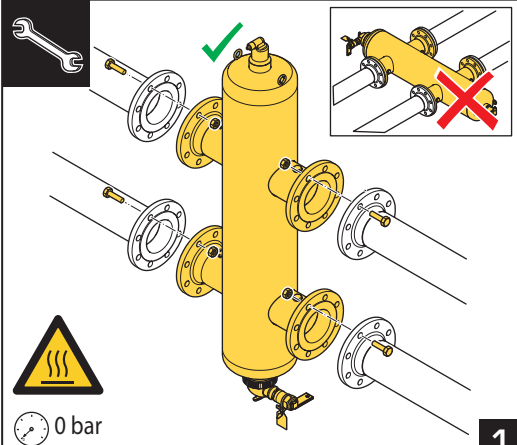




< 50% glycol




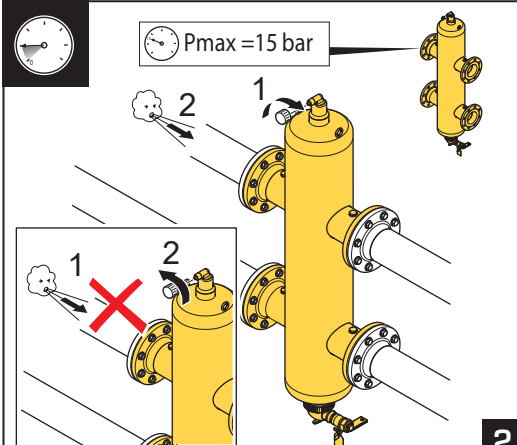





 0 bar

1

 Pmax = 15 bar




2

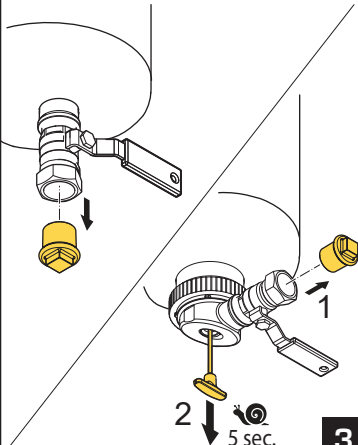


2 ↓ 5 sec.

3

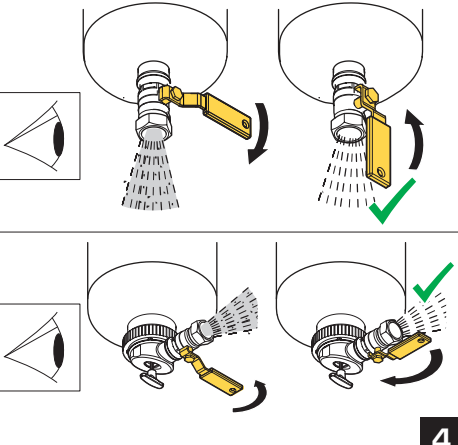

4

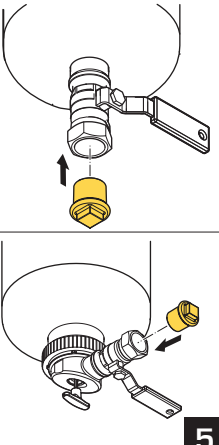

5